


iFace 306 - Face + Fingerprint based Time & Attendance/Access Control Terminal

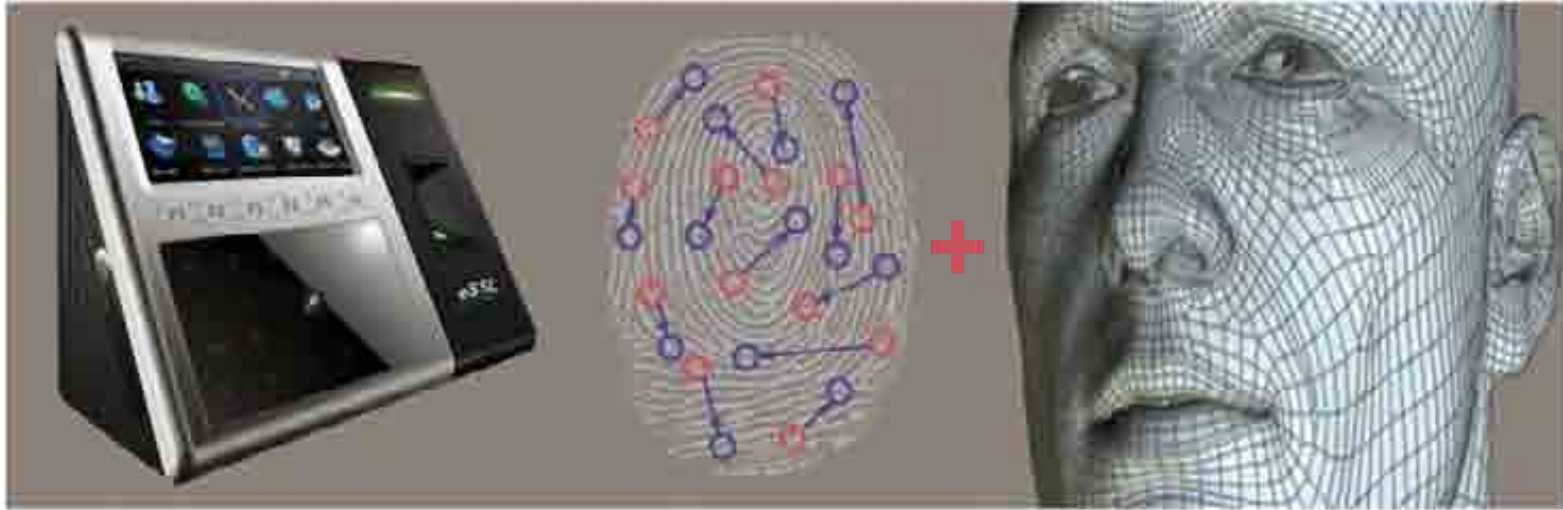

Technical Specification

Users: 700 Face, 5000 Fingerprints

Transaction: 1,00,000 Logs

CPU: 32bit Microprocessor

Camera: High Definition Infrared Camera

Sensor: 500 dpi Optical Sensor

Dimension: 193.6 mm * 165.2 mm * 86 mm

Identification speed: ≤ 2 Sec

FAR: $\leq 0.0001\%$

FRR: $\leq 1\%$

Communication: RS232, RS485, TCP/IP

Battery Backup: 5 Hrs (Optional)

Operation temperature: $0^{\circ}\text{C} - 45^{\circ}\text{C}$

Operation Humidity: 20-80%

Power: 12V DC, 3A

Optional Functions: Prox/MIFARE/HID card reader, GPRS, Wifi

Identifies below images with high efficiency

